

PPC

PLP-P505FR

Fanless and Low Power 15" Panel PC

Features and Benefits:

- Intel® Celeron® M ULV CPU on board
- Totally fanless and quiet design
- Low power consumption and economical solution
- On-board IDE interface, Type II Compact Flash slot
- 24V DC power support




Your IPC Solutions Partner




ISO CERTIFIED
9001 14001

PLP-P505FR *Fanless and Low Power 15" Panel PC*


Front View

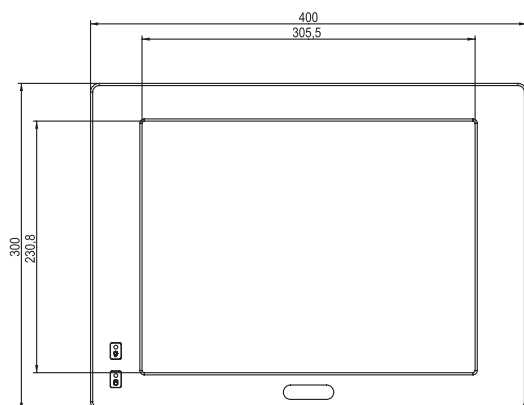

Rear View

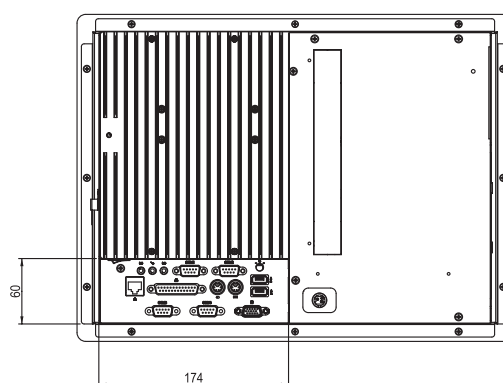

Side View

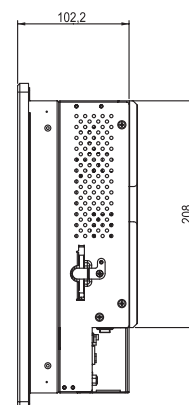

Unit: mm

Specification

Systems

CPU Support	Intel® Celeron® M ULV 1.0GHz on board (non L2 cache)
Memory Support	1 x 200pin DDR SO-DIMM, support DDR 333 SDRAM up to 1GB
Front Bazel	Aluminum
IP65/NEMA4	Yes
Power Supply	DC 24Vin 80W power supply / AC 100-240Vin (optional power adapter)
O.S. Support	Win 98SE/2000/XP/CE.net, Linux Redhat 8.0/9.0
Dimension (WxHxD)	400 x 300 x 99 mm (15.6" x 11.7" x 3.89")
System Weight	10 Kg (22lb)
VESA Mounting Support	75mm / 100mm VESA bracket (optional)
Certificate	CE / FCC

I/O Ports

USB	2 x USB2.0
KB / Mouse	2
Audio	Line in / Line out / MIC in
Parallel	1 x parallel port (SPP / EPP / ECP)
Serial Port	4 x COMs, COM1 supports +5V or +12V, COM2 for RS232/422/485, COM 2/3/4 supports +5V only

LAN	10/100 Mbps
VGA	1
Brightness Control	VR on rear panel
Drive Bay	1 x 2.5" HDD, 1 x IDE CF slot on board, 1 x Slim CD-ROM (optional)
Expansion Slots	1 x PCI or 3 x PCI slot (optional)

Display

LCD	15" XGA TFT LCD (1024 x 768)
Touch Screen	7W Analog resistive (USB interface)

Environment

Operating Temp.	0° ~ 40°C
Storage Temp.	-20° ~ 60°C
Humidity	20% ~ 90%

Ordering

PLP-P505FR	Fanless Panel PC with 15" LCD, Intel Celeron M ULV 1.0GHz CPU board, resistive touchscreen, 24V 80W DC power supply
-------------------	---

All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in MAR. 2007.



Your IPC Solutions Partner