

PPC

PLP-P508FR

Fanless and Low Power
8.4" Panel PC

Features and Benefits:

- Intel® Celeron® M ULV CPU on board
- Totally Fanless and Quiet design
- Low power consumption and economical solution
- Creative Space Utilization
- On-board IDE interface, Type II CompactFlash slot
- High precision touchscreen
- 24V DC power support, optional power adapter for AC power




Your IPC Solutions Partner




ISO CERTIFIED
9001 14001

PLP-P508FR *Fanless and Low Power 8.4" Panel PC*


Front View

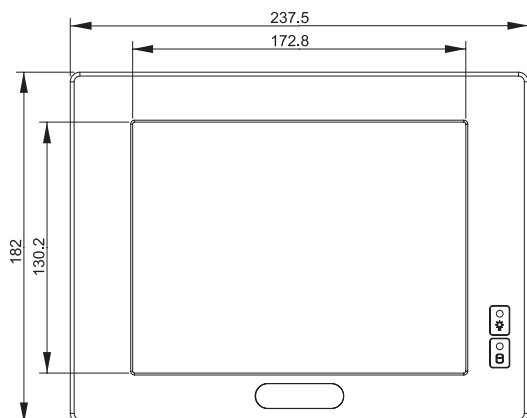

Rear View

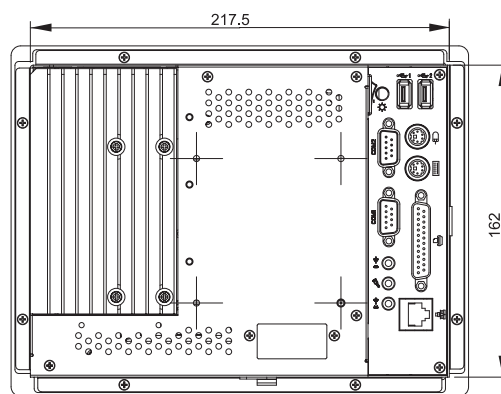

Side View

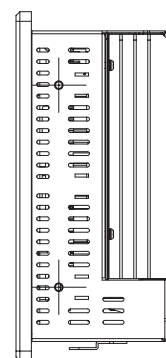

Unit: mm

Specification

Systems

CPU Support	Intel® Celeron® M ULV 1.0GHz on board (non L2 cache)
Memory Support	1 x 200pin DDR SO-DIMM, support DDR 333 SDRAM up to 1GB
Front Bazel	Aluminum
IP65/NEMA4	Yes
Power Supply	DC 24Vin 60W power supply / AC 100-240Vin (optional power adaptor)
O.S. Support	Win 98SE/2000/XP/CE.net, Linux Redhat 8.0/9.0
Dimension (WxHxD)	247mm x 185mm x 82mm (9.73" x 7.3" x 3.23")
System Weight	5 Kg (11.02lb)
VESA Mounting Support	75mm
Certificate	CE / FCC

I/O Ports

USB	2 x USB2.0
KB / Mouse	2
Audio	Line in / Line out / MIC in
Parallel	1 x parallel port (SPP / EPP / ECP)
Serial Port	2 x COMs, COM1 supports +5V or +12V, COM2 for RS232/422/485, supports +5V only

LAN	10/100Mbps
VGA	N/A
Brightness Control	VR on rear panel
Drive Bay	1 x 2.5" HDD, 1 x IDE CF slot on board
Expansion Slots	N/A

Display

LCD	8.4" SVGA TFT LCD (800 x 600)
Touch Screen	5W Analog resistive (USB interface)

Environment

Operating Temp.	0° ~ 40°C
Storage Temp.	-20° ~ 60°C
Humidity	20% ~ 90%

Ordering

PLP-P508FR	Fanless Panel PC with 8.4" LCD, Intel Celeron M ULV 1.0GHz CPU board, resistive touchscreen, 60W DC power
-------------------	---

All information contained in this document is subject to change without any prior notice.



Your IPC Solutions Partner